




COUNTER FRONT CUTOUT REQUIREMENTS

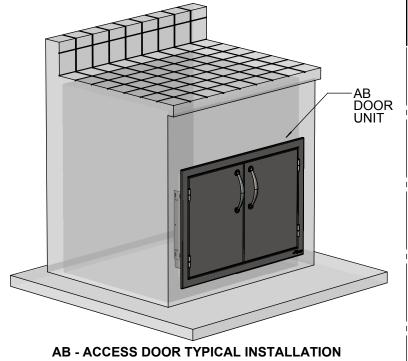


FRONT VIEW SINGLE NARROW DOORS




TOP VIEW: DIMENSIONS APPLY TO AB-17 L & R MODELS

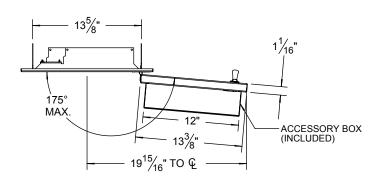


FRONT VIEW SINGLE WIDE DOORS






PROFILE (ALL DOORS)



CUTOUT WIDTH DIMENSION (W):

18¹/₅"

- AB-17L & R = 13-7/8" AB-23L & R = 19-7/8" AB-30 = 27-1/4" AB-36 = 33-1/4" AB-42 = 39-1/4"

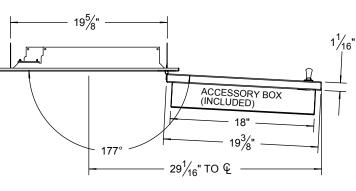

TOP VIEW: DIMENSIONS APPLY TO AB-23 L & R MODELS



DRAWN BY: ADRIAN CRISCI CREATED: 10/24/2008 8:57:36 AM PROJECT TITLE:

DRAWING TITLE: **AB ACCESS DOOR SPECIFICATIONS**


AB DOORS


DRAWING NO.:

AB DOOR - SPEC SHEET


SHEET 1 OF 2


FRONT VIEW DOUBLE SIDED NARROW DOORS




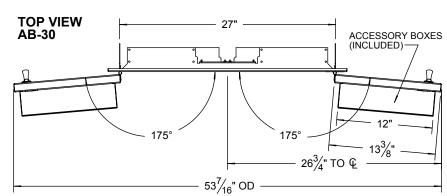

FRONT VIEW DOUBLE SIDED WIDE DOORS

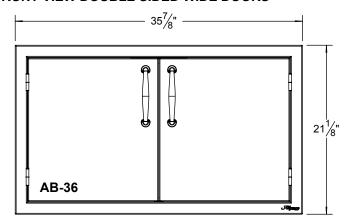

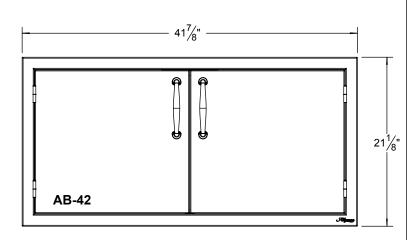

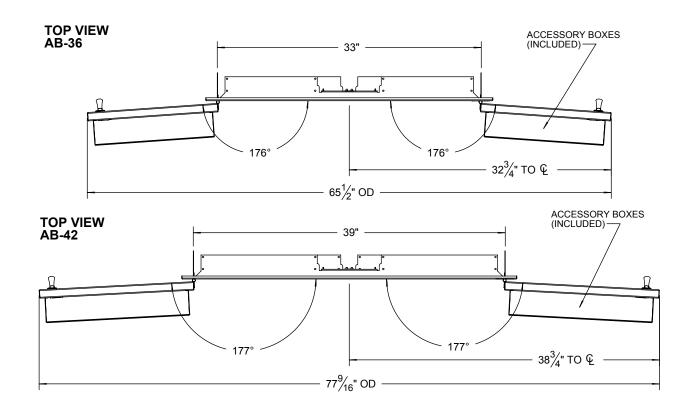



THE INFORMATION CONTAINED IN THIS DRAWING IS THI SOLE PROPERTY OF SUPERIOR EQUIPMENT SOLUTION IN PART OR AS A WHOLI WITHOUT WRITTEN PERMISSION FROM SUPERIOR EQUIPMENT SOLUTIONS, INC. IS PROHIBITED.

DRAWN BY: ADRIAN CRISCI CREATED: 10/24/2008 8:57:36 AM PROJECT TITLE:

AB DOORS

DRAWING TITLE:

AB ACCESS DOOR SPECIFICATIONS

DRAWING NO.:

AB DOOR - SPEC SHEET

SHEET 2 OF 2