

# BROMIC **SMART-HEAT™**

Divided into our distinct Eclipse, Platinum and
Tungsten series, all Bromic outdoor
heaters are designed and engineered in-house and
are constructed from premium materials to
create products that strike the perfect balance
between performance, reliability and beauty.

# ECLIPSE SMART-HEAT™ ELECTRIC

Reimagine the outdoors with our Eclipse Smart-Heat™ series.

Available in seven unique designs, the Bromic Eclipse series adds style, warmth and light to design-focused outdoor spaces.



ECLIPSE ELECTRIC PORTABLE 24" TWIN CEILING MOUNT POLE 24" STRAIGHT CEILING MOUNT POLE WALL MOUN

# ECLIPSE SMART-HEAT™ ELECTRIC PORTABLE


Add warmth and comfort to outdoor spaces while striking the perfect balance between ambience, style, and functionality with our Eclipse Smart-Heat™ Electric Portable Heater.






# ECLIPSE SMART-HEAT<sup>™</sup> ELECTRIC

Dim the lights and turn up the heat with our Eclipse Smart-Heat™ Electric heater. Available in six unique mounting options, the new Bromic Eclipse Smart-Heat™ Electric series brings comfort, light and style to commercial and residential outdoor spaces.

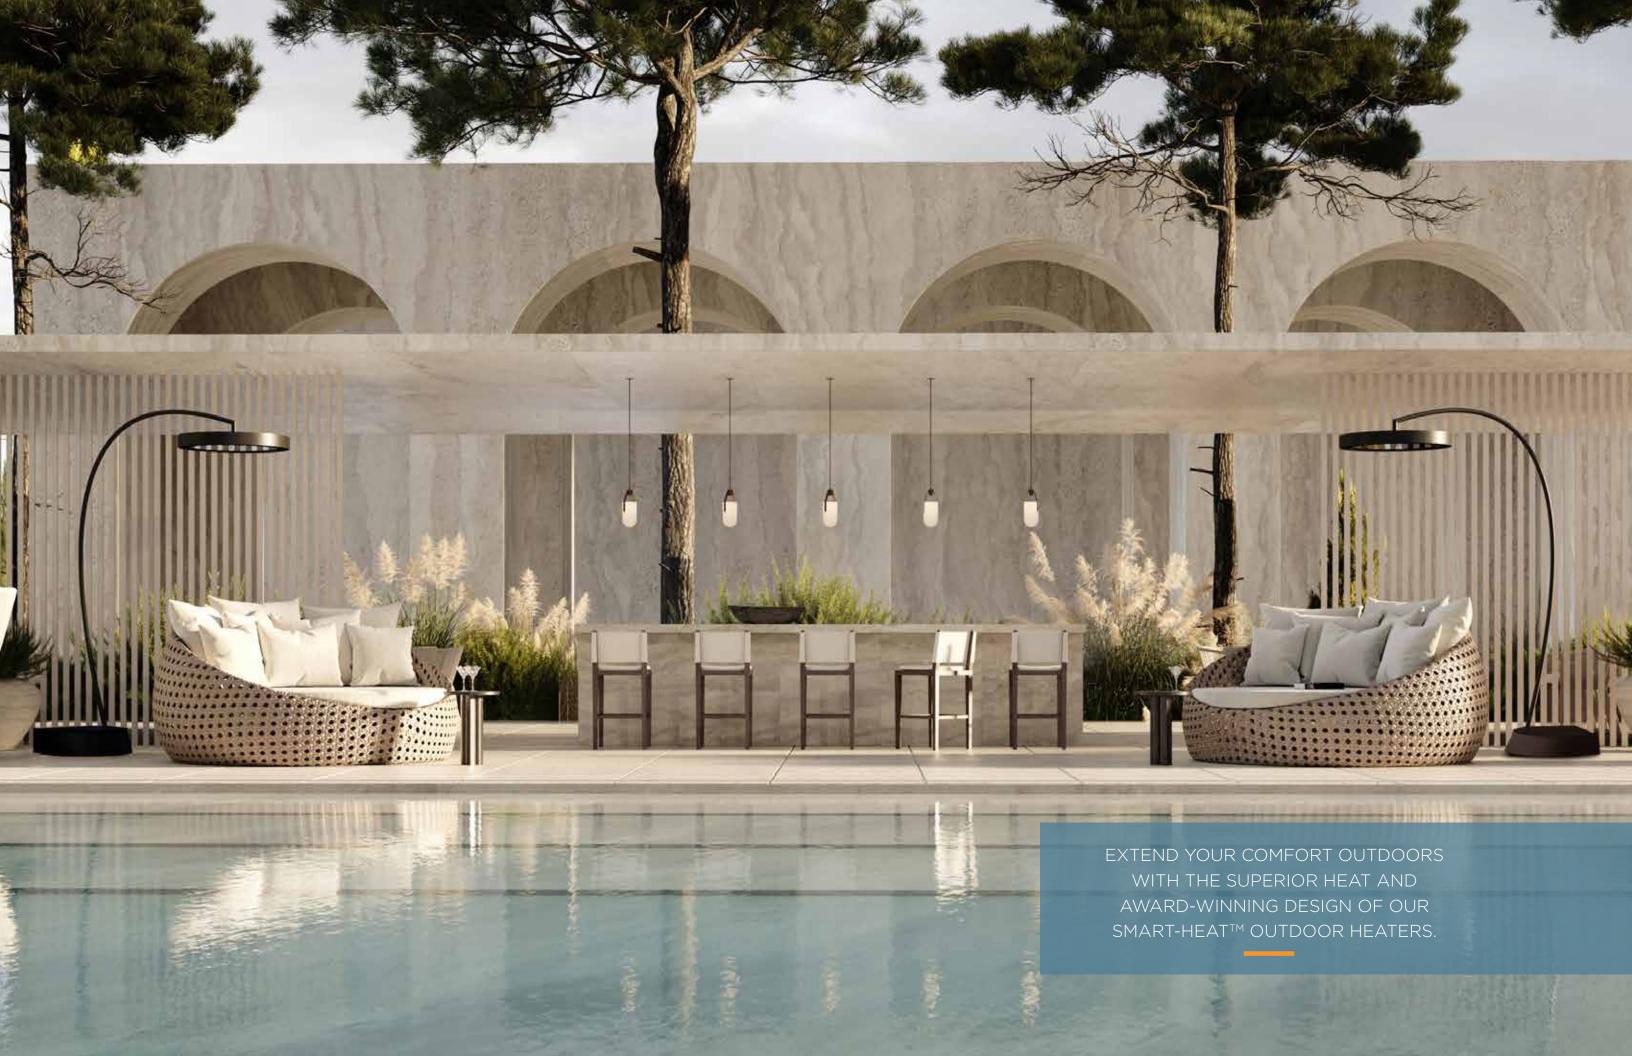






# PLATINUM SMART-HEAT™ ELECTRIC



Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces. This slim-line, stainless-steel unit spreads comfort evenly, all while minimizing light emission and blending seamlessly into the background with our recess mounting solutions. The Platinum Electric range is also available in a marine-grade 316 stainless steel for extra longevity in coastal and marine environments.






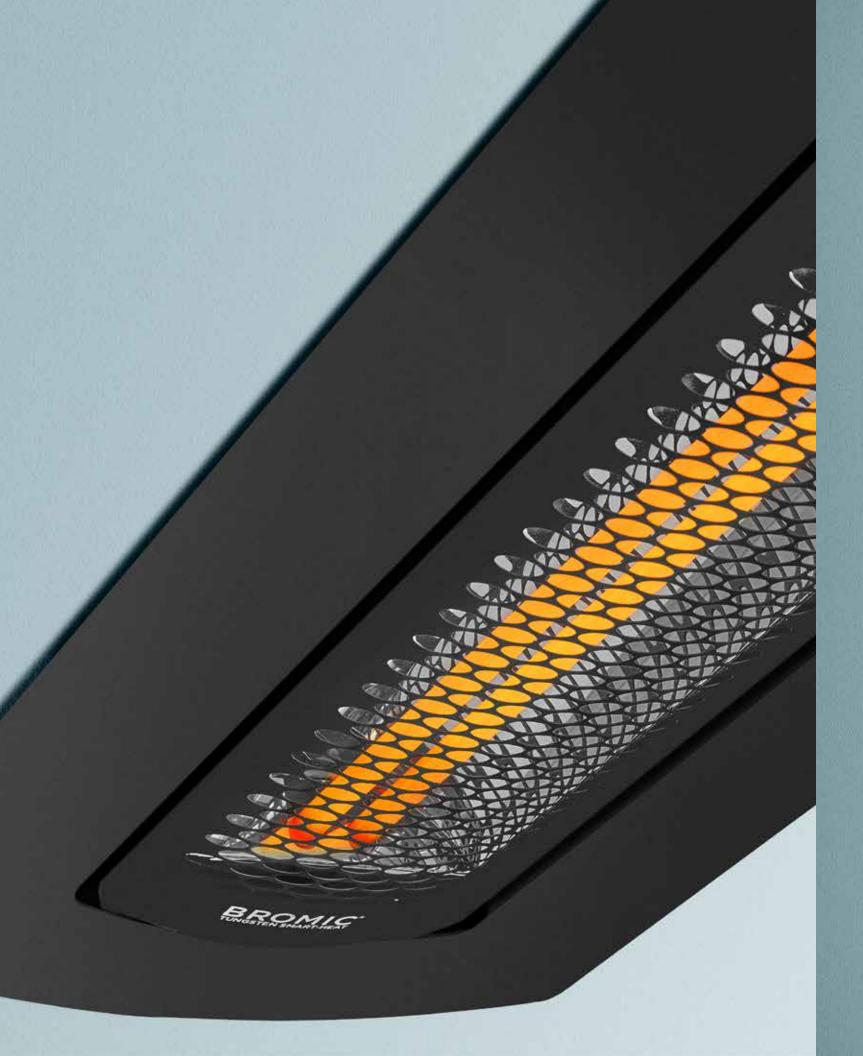


# TUNGSTEN SMART-HEAT™ ELECTRIC

Divide the second secon

Our Tungsten Smart-Heat™ Electric series offers high performance radiant heating for outdoor and semi-enclosed spaces alike, with an industrial design style. It also boasts a high-temperature coating to suit all environments. With a stainless-steel construction, its durable element will emit a soft red glow to create a warm ambience in your space.

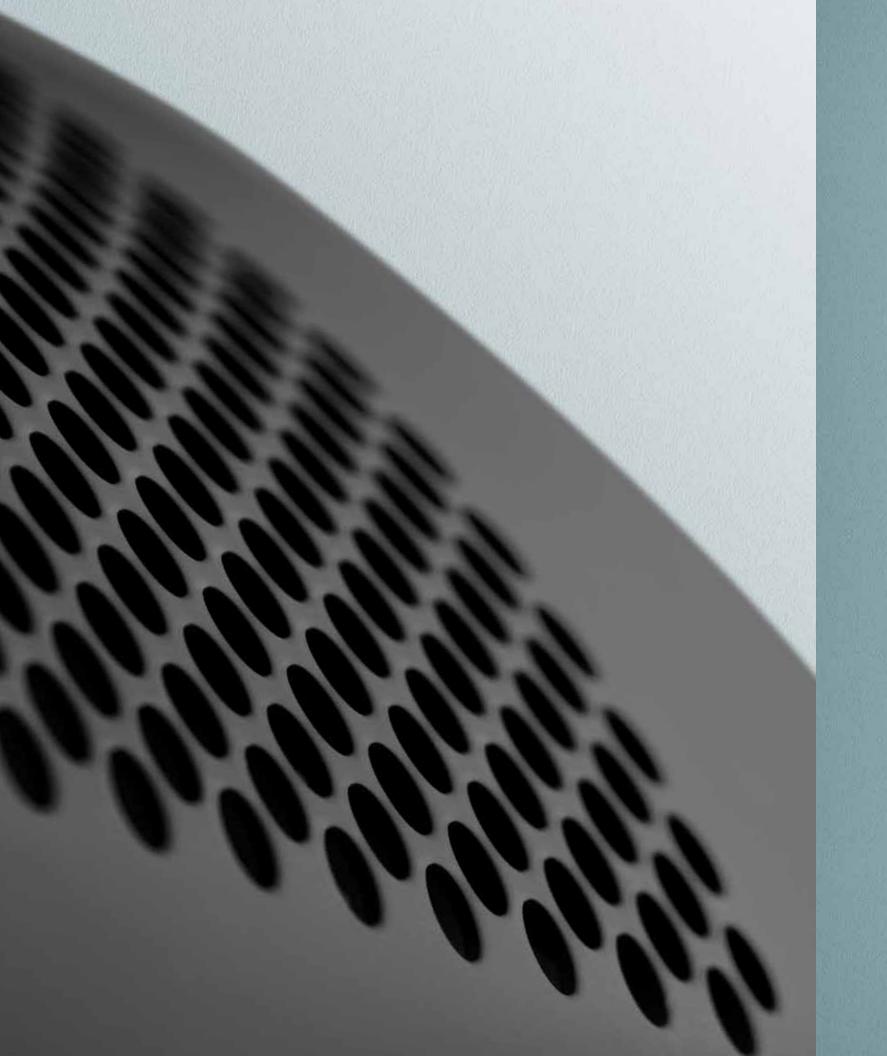

# TUNGSTEN SMART-HEAT™ GAS

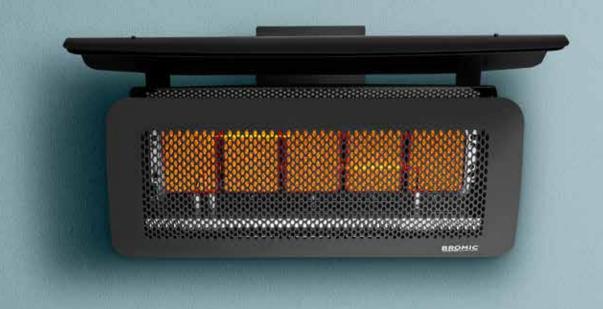

Our Tungsten Smart-Heat™ Gas heater has a durable, soft flowing curved facia and engineered body, which produces formidable heat to create a truly comfortable outdoor space. Its easy pivot arm allows for greater positioning and directional heat control. This heater also has a range of accessories available to provide versatility in mounting & controller options.





# TUNGSTEN **SMART-HEAT™ PORTABLE**

Its neutral black finish and award-winning design make it a piece of modern art. The Tungsten Smart-Heat™ Portable heater offers efficient directional heat and is a versatile heating solution for any outdoor settings. Its modular construction with built-in wheels allows for easy maneuverability in tighter spaces.




# SMART-HEAT™ WIRELESS CONTROLLERS

With the option to connect groups of heaters from a single point as well as dimming heatingoutputs, the Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment.

Learn more about our wireless control options bromic.com

# CONTROLS SIMPLE, SMART AND WIRELESS

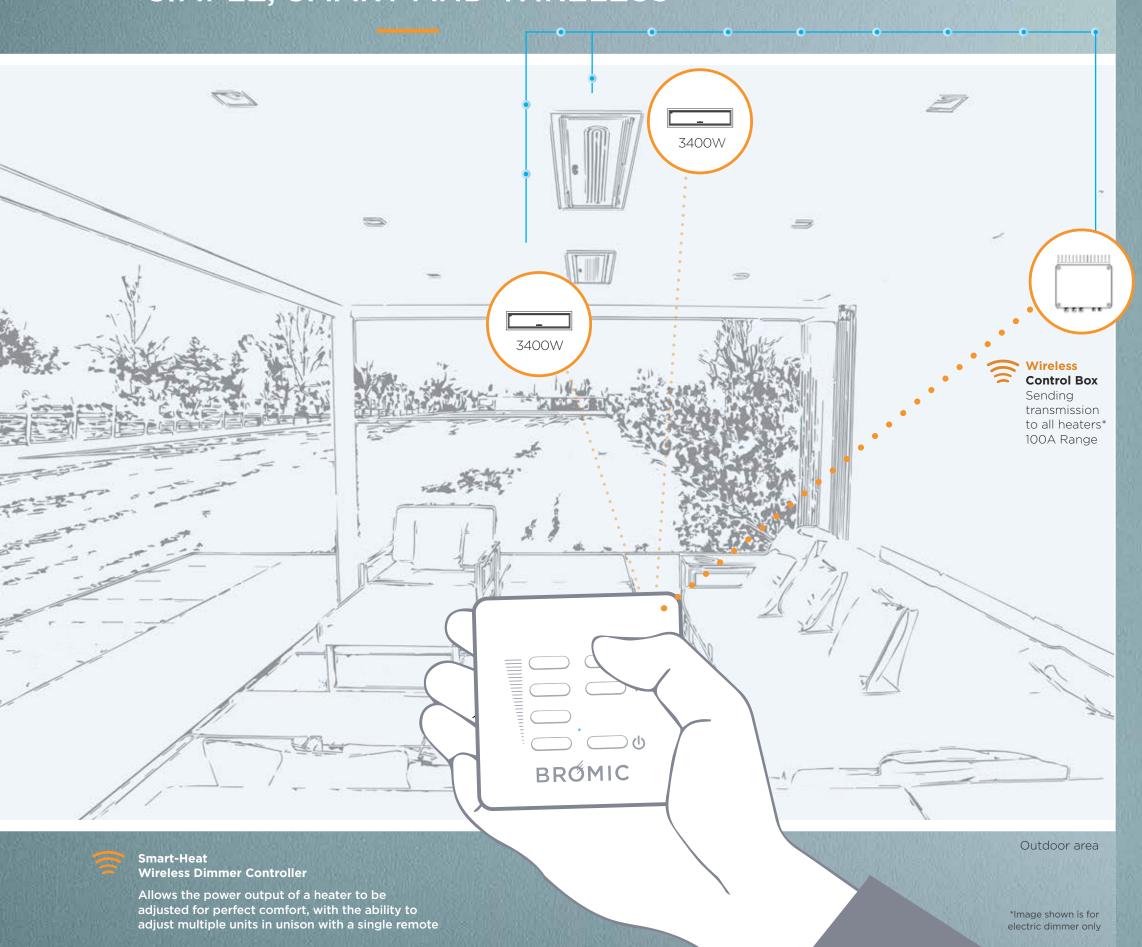



#### WIRELESS MASTER REMOTE

Our Bromic Master Remote is invaluable for larger venues. Offering user-programmable customization, the Bromic Master Remote gives you full control over an unlimited number of Electric Heater Controllers in up to 6 zones within its 100ft range. Compatible with both our standard Dimmer and Eclipse Dimmer Controllers, managing your heat has never been such a breeze.



#### **ECLIPSE DIMMER CONTROLLER**

Set the perfect ambience with the Bromic Eclipse Dimmer Controller and wireless Remote. Suitable for our Eclipse Pendant and Portable series, the Bromic Eclipse Dimmer Controller and Remote can quickly dim the lighting in 1% increments and the heating output (0%, 33%, 66%, 100%) to create the perfect ambience – every time.



#### ON | (GAS) The Br power On I C

## ON | OFF 4-CHANNEL REMOTE CONTROLLER\* (GAS & ELECTRIC)

The Bromic Smart-Heat Wireless On | Off Controller can switch power supply to two separate outputs, enabling independent 'On | Off' control without even having to move from your seat.





# DIMMER CONTROLLER\* (ELECTRIC ONLY)

The Bromic Smart-Heat™ Wireless Dimmer Controller allows you to adjust the heat from 1-100% for perfect comfort and complete flexibility.



#### BROMIC SMART-HEAT™LINK

The Bromic Smart-Heat™ Link is compatible with some of the leading Home Automation systems, allowing you to easily control your Bromic outdoor heaters from your hom automation control panel \*\*

\*\* Requires RS232 plugin

\*Please contact a Bromic heating specialist to discuss the ideal solution for your outdoor space. Our free design service includes wiring diagrams for set up options.

## ECLIPSE **SMART-HEAT™ ELECTRIC PORTABLE**

#### MODEL

ESS STEEL
EEL
12.1 A (240V)
_

DIMMER CONTROL	INCLUDED
MASTER REMOTE ECLIPSE*	BH3623002-1 (OPTIONAL)


 $<sup>^*\</sup>mbox{Control}$  up to six zones of heaters with unlimited heaters per zone from a single remote.

Measurements displayed within this catalog are minimum requirements for installation.

Bromic takes no responsibility for incorrect or non-compliant installations.

All measurements in this catalog are displayed in inches.

#### PRODUCT MEASUREMENTS







#### FREESTANDING

#### FRONT VIEW

#### CEILING & WALL CLEARANCE

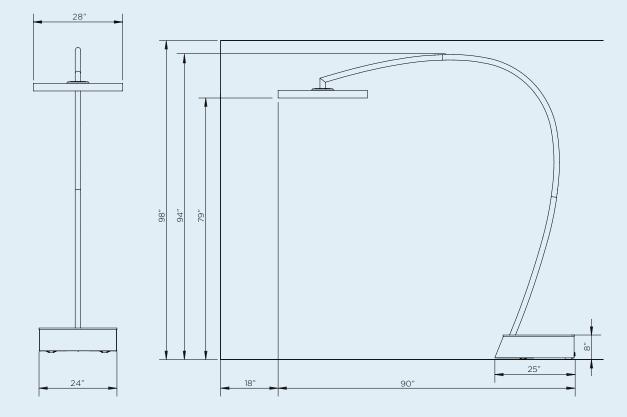

#### HEAT AREA

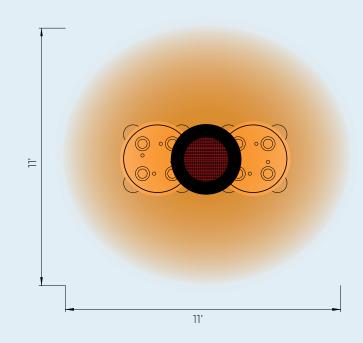

#### 2900W SERIES

HEATING APPROXIMATELY 121FT<sup>2</sup> 2900W HEATING POWER

\*HEAT AREA DEPENDENT ON AMBIENT TEMPERATURE AND WIND, OPTIMUM CONDITIONS EXPERIENCED AT APPROX 60°F AND IN A LOW WIND COVERED ENVIRONMENT.

## ECLIPSE **SMART-HEAT™ ELECTRIC PENDANT**

#### MODE

PRODUCT CODE	BH0920001-1
FUEL TYPE	ELECTRIC (2900W)
COLOR	MATTE BLACK
MATERIAL (HEATER HEAD)	PREMIUM COATED 304 STAINLESS STEEL
MATERIAL (MOUNTING ARMS)	PREMIUM, DOUBLE COATED STEEL
HEAT AREA	121FT <sup>2</sup>
LED COLOR	WARM WHITE - DIMMABLE
LED TEMPERATURE	3000K
LED LUMENS	216.6
RATED CURRENT & VOLTAGE	11.4 A (220V) / 11.8 A (230V) / 12.1 A (240V)
MINIMUM FLOOR CLEARANCE	CEILING 96"   WALL 96"

#### MOUNTING OPTIONS

WALL MOUNT	BH3230006 (OPTIONAL)
8" STRAIGHT CEILING MOUNT POLE	BH3230001 (OPTIONAL)
24" STRAIGHT CEILING MOUNT POLE	BH3230002 (OPTIONAL)
24" TWIN STRAIGHT CEILING MOUNT POLE	BH3230003 (INCLUDED)
24" CURVED CEILING MOUNT POLE	BH3230004 (OPTIONAL)
48" STRAIGHT CEILING MOUNT POLE	BH3230005 (OPTIONAL)

#### **CONTROL OPTIONS**

DIMMER CONTROL	BH3230007-1 (RECOMMENDED)
MASTER REMOTE ECLIPSE*	BH3623002-1 (OPTIONAL)


 $<sup>^*</sup>$ Control up to six zones of heaters with unlimited heaters per zone from a single remote. Dimmer control required.

 $\label{thm:measurements} \mbox{ Measurements displayed within this catalog are minimum requirements for installation.}$ 


Bromic takes no responsibility for incorrect or non-compliant installations.

All measurements in this catalog are displayed in inches.


#### PRODUCT MEASUREMENTS

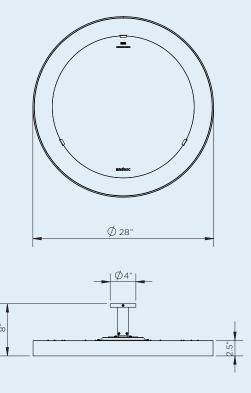


#### **CEILING MOUNTING OPTIONS**

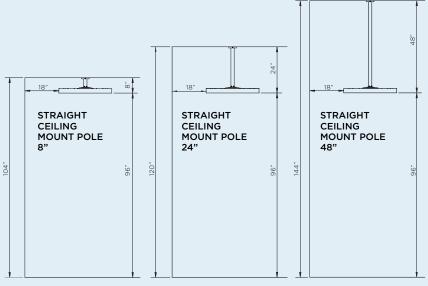


## WALL MOUNTING





#### HEAT AREA



#### 2900W SERIES

HEATING APPROXIMATELY 121FT<sup>2</sup> 2900W HEATING POWER

\*HEAT AREA DEPENDENT ON AMBIENT TEMPERATURE AND WIND. OPTIMUM CONDITIONS EXPERIENCED AT APPROX 60°F AND IN A LOW WIND COVERED ENVIRONMENT.


## PLATINUM **SMART-HEAT™ GAS**


MODEL NUMBER	300 SERIES	500 SERIES
PRODUCT CODE	BH0110002-1   BH0110001-1	BH0110004-1   BH0110003-1
FUEL TYPE	LPG   NG	LPG   NG
COLOR	BLACK	STAINLESS
HEAT AREA	160FT <sup>2</sup>	215FT <sup>2</sup>
RATED CURRENT	110 V/2A	110 V/2A
MINIMUM FLOOR CLEARANCE	96"	96"
OUTPUT	23,600 BTU	39,800 BTU
MOUNTING OPTIONS		
CEILING MOUNT	✓	✓
WALL MOUNT	✓	✓
RECESSED   FLUSH MOUNT	-	-
CEILING POLE MOUNT	✓	✓
FREESTANDING	-	-
CONTROL OPTIONS		
ON   OFF	✓	✓
ON   OFF PRODUCT CODE	BH3130010-1	BH3130010-1
DIMMER	-	-
MASTER REMOTE	-	-


Measurements displayed within this catalog are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations.

All measurements in this catalogue are displayed in inches.


#### PRODUCT MEASUREMENTS









## PRODUCT MEASUREMENTS WITH HEAT DEFLECTOR







#### **CEILING & WALL MOUNT CLEARANCE**

WALL MOUNT CLEARANCE

100.6"

124"

100.6"

114"

100.6"

114"

100.6"

114"

100.6"

100.6"

114"

100.6"

100.6"

100.6"

114"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"

100.6"


100.6"

100.6"

100.6"

100.6"


100.




#### WALL BRACKET



#### **HEAT AREA**

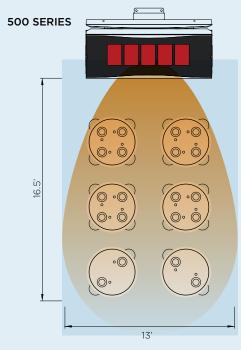

HEATING APPROXIMATELY 215FT<sup>2</sup> 39,800 BTU HEATING POWER

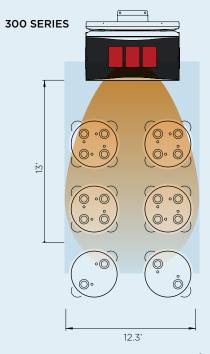

HEATING APPROXIMATELY 160FT<sup>2</sup> 23,600 BTU HEATING POWER


## PLATINUM SMART-HEAT™ ELECTRIC

MODEL NUMBER	2300W SERIES	3400W SERIES	4500W SERIES
PRODUCT CODES PLATINUM ELECTRIC	BH0320003   BH0320007 BH0320019   BH0320020	BH0320005   BH0320008 BH0320021   BH0320022	BH3622000   BH3622004 BH3622001   BH3622005
PRODUCT CODES PLATINUM ELECTRIC MARINE	BH0320015   BH0320017 BH0320023   BH0320024	BH0320016   BH0320018 BH0320025   BH0320026	BH3622002   BH3622006 BH3622003   BH3622007
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC
COLOR	BLACK   WHITE	BLACK   WHITE	BLACK   WHITE
HEAT AREA	65FT <sup>2</sup>	108FT <sup>2</sup>	143FT <sup>2</sup>
RATED CURRENT**	220 - 240V/9.6A 208V/11.1A	220 - 240V/14.2A 208V/16.3A	220 - 240V/18.8A 208V/21.6A
MINIMUM FLOOR CLEARANCE	WALL 72"   CEILING 96"	WALL 72"   CEILING 96"	WALL 72"   CEILING 96"
MOUNTING OPTIONS			
CEILING MOUNT	INCLUDED	INCLUDED	INCLUDED
WALL MOUNT	INCLUDED	INCLUDED	INCLUDED
RECESS KIT   FLUSH MOUNT	✓	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH3130017	BH3130027	BH3623000
NEW RECESS KIT   LOW CLEARANCE	✓	✓	-
CEILING POLE EXTENSION	✓	$\checkmark$	✓
CEILING POLE (2') PRODUCT CODE	BH3130023-1	BH3130023-1	BH3623020
CEILING POLE (4') PRODUCT CODE	BH3130024-1	BH3130024-1	BH3623021
FREESTANDING	-	-	-
CONTROL OPTIONS			
ON   OFF	✓	✓	✓
ON   OFF PRODUCT CODE	BH3130010-1	BH3130010-1	BH3130010-1
DIMMER	✓	✓	✓
DIMMER PRODUCT CODE	BH3130011-1	BH3130011-1	BH3130011-1
MASTER REMOTE *	✓	✓	✓
MASTER REMOTE PRODUCT CODE	BH3130012-1	BH3130012-1	BH3130012-1


<sup>\*</sup> Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters.

Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.


#### WALL BRACKET (INCLUDED)



#### **CEILING BRACKET (INCLUDED)**





#### PRODUCT MEASUREMENTS

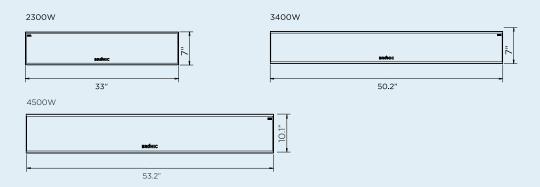

#### **CEILING RECESS KIT**









**CEILING RECESS FRAME 3400W** 

#### CEILING RECESS FRAME 4500W




#### **CEILING CAVITY GUIDE**

MINIMUM CAVITY SIZE FOR

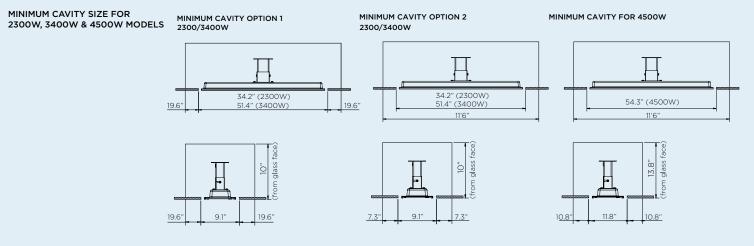


<sup>\*\*</sup> Available in 208V and 220-240V configurations.


#### **CEILING & WALL MOUNT CLEARANCE**

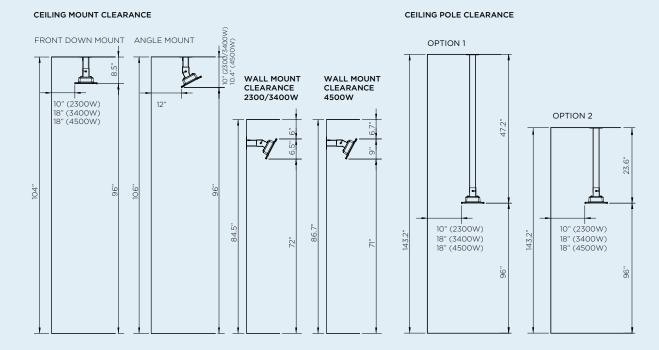

#### **HEAT AREA**

\*HEAT AREA DEPENDENT ON AMBIENT TEMPERATURE AND WIND. OPTIMUM CONDITIONS EXPERIENCED AT APPROX 60°F AND IN A LOW WIND COVERED ENVIRONMENT.

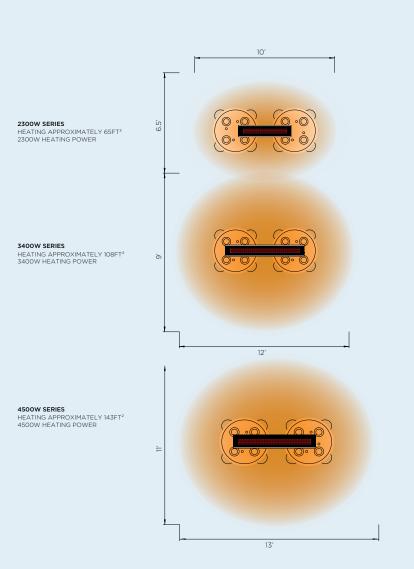

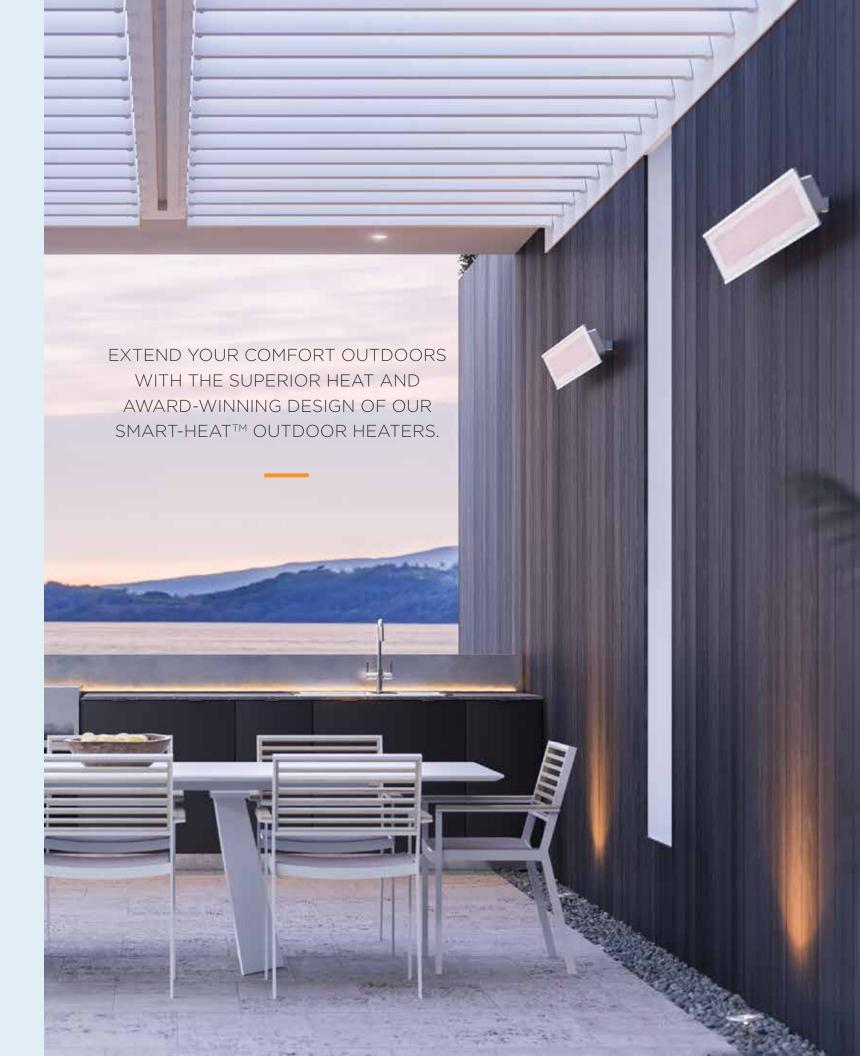

## TUNGSTEN **SMART-HEAT™ GAS**

MODEL NUMBER	300 SERIES	500 SERIES
PRODUCT CODE	BH0210002-1   BH0210001-1	BH0210004-1   BH0210003-1
FUEL TYPE	LPG   NG	LPG   NG
COLOR	BLACK	BLACK
HEAT AREA	160FT <sup>2</sup>	215FT <sup>2</sup>
ELECTRICAL CONNECTION	110V/2A	110V/2A
MINIMUM FLOOR CLEARANCE	96"	96"
OUTPUT	26,000 BTU	43,000 BTU
MOUNTING OPTIONS		
CEILING MOUNT	✓	✓
WALL MOUNT	✓	✓
RECESSED   FLUSH MOUNT	-	-
CEILING POLE MOUNT	✓	✓
FREESTANDING	-	-

#### CONTROL OPTIONS


ON   OFF	✓	✓
ON   OFF PRODUCT CODE	BH3130010-1	BH3130010-1
DIMMER	-	-
MASTER REMOTE	-	-


Measurements displayed within this catalog are minimum requirements for installation.


Bromic takes no responsibility for incorrect or non-compliant installations.

All measurements in this catalogue are displayed in inches.


#### PRODUCT MEASUREMENTS










## PRODUCT MEASUREMENTS WITH HEAT DEFLECTOR








#### **CEILING & WALL MOUNT CLEARANCE**

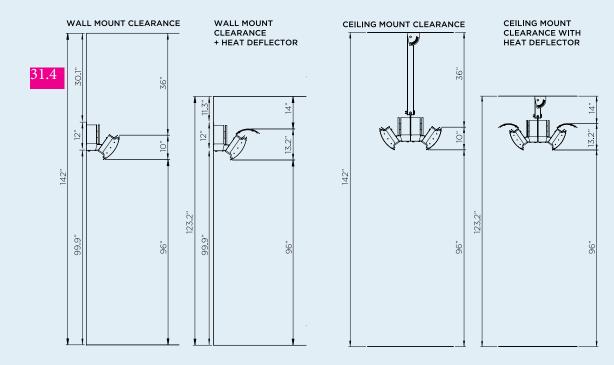

#### WALL BRACKET



# HEAT AREA 500 SERIES 300 SERIES

HEATING APPROXIMATELY 215FT<sup>2</sup> 43,000 BTU HEATING POWER

HEATING APPORXIMATELY 160FT<sup>2</sup> 26,000 BTU HEATING POWER

## TUNGSTEN **SMART-HEAT™ ELECTRIC**


MODEL NUMBER	2000 SERIES	3000 SERIES	4000 SERIES	6000 SERIES
PRODUCT CODE	BH0420030	BH0420031	BH0420032 BH0420034 BH0420012	BH0420033 BH0420035 BH0420013
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
COLOR	BLACK	BLACK	BLACK   WHITE	BLACK   WHITE
HEAT AREA	65FT <sup>2</sup>	100FT <sup>2</sup>	130FT <sup>2</sup>	160FT <sup>2</sup>
RATED CURRENT **	220-240V/8.3A 208V/9.62A 277V/7.22A	220-240V/12.5A 208V/14.42A 277V/10.83A	220-240V/16.6A 208V/19.23A 277V/14.44A	220-240V/25A 208V/28.85A 277V/21.66A
MINIMUM FLOOR CLEARANCE	WALL 72"	CEILING 96"	WALL 7	72"   CEILING 96"
MOUNTING OPTIONS				
CEILING MOUNT	✓	✓	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH8180010	BH8180011	BH8180010	BH8180011
WALL MOUNT	✓	✓	✓	✓
RECESSED   FLUSH MOUNT	✓	✓	✓	✓
CEILING POLE MOUNT	✓	✓	✓	✓
TUBE SUSPENSION KIT (36") PRODUCT CODE		BH818	30012	
FREESTANDING	-	-	-	-
CONTROL OPTIONS				
ON   OFF	✓	✓	✓	✓
ON   OFF PRODUCT CODE		BH313	0010-1	
DIMMER	✓	✓	✓	✓
DIMMER PRODUCT CODE		BH313	0011-1	
MASTER REMOTE *	✓	✓	✓	✓
MASTER REMOTE PRODUCT CODE		BH313	OO12 BH3130012	-1

<sup>\*</sup> Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters.


Measurements displayed within this catalog are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurements in this document are displayed in inches.

\*\* Available in varying voltages: 240V, 208V and 277V


#### PRODUCT MEASUREMENTS




#### 3000W & 6000W




#### **CEILING RECESS**




#### CEILING RECESS FRAME 3000W & 6000W




#### CEILING RECESS




2000W & 4000W




3000W & 6000W




#### **CEILING & WALL MOUNT CLEARANCE**

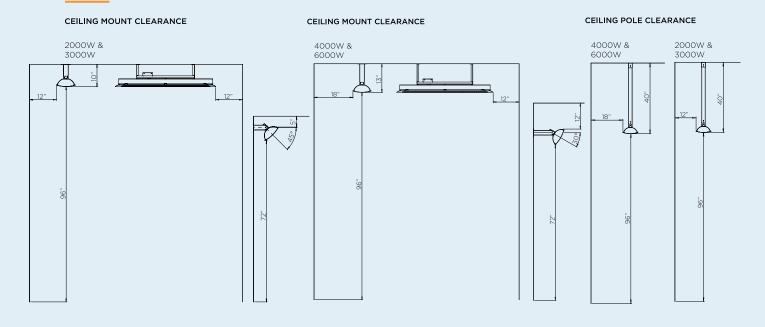


#### WALL BRACKET (INCLUDED)






#### **HEAT AREA**











4000W SERIES



6000W SERIES



12.7

## TUNGSTEN **SMART-HEAT™ PORTABLE**

#### MODEL NUMBER

TIODEE NOTIBER	
PRODUCT CODE	BH0510001   BH0510005
FUEL TYPE	LPG   NG
COLOR	BLACK
HEAT AREA	215FT <sup>2</sup>
ELECTRICAL CONNECTION	-
MINIMUM CEILING CLEARANCE	36"
OUTPUT	38,500 BTU
MOUNTING OPTIONS	
CEILING MOUNT	-

#### **CONTROL OPTIONS**

FREESTANDING

RECESSED | FLUSH MOUNT CEILING POLE MOUNT

WALL MOUNT

ON   OFF	-	
DIMMER	-	
MASTER REMOTE	_	


#### ADDITIONAL OPTIONS


HEATER COVER PRODUCT CODE	BH3030010
---------------------------	-----------

Measurements displayed within this catalog are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurements in this catalogue are displayed in inches.


SIDE VIEW


#### PRODUCT MEASUREMENTS

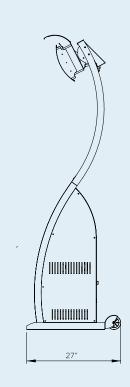

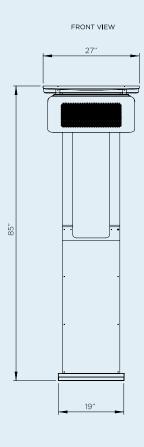


#### **CEILING & WALL CLEARANCE**





#### **HEAT AREA**

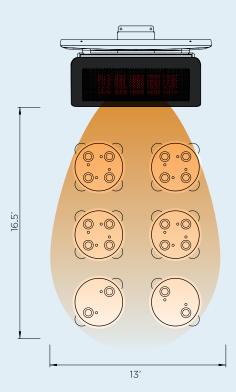

TUNGSTEN PORTABLE
HEATING APPORXIMATELY 215FT<sup>2</sup>
38,500 BTU HEATING POWER



# DESIGN SERVICE

As part of our complimentary service, Bromic Heating Specialists will custom design and tailor a solution to best heat your outdoor living and entertainment spaces.

Learn more about our design service bromic.com



# ABOUT BROMIC GROUP

Bromic's reputation for industry and innovation reaches back to 1978. Initially a supplier of gas components, Bromic has since grown to become an international leader that designs, manufactures and distributes a diverse range of quality, engineered products on a global scale.

