

# Simple On/Off Switch Assemblies

**Single On/Off Switches are designed for use with all single element heaters.**

- Low cost control option for all single element heaters.
- Range 120/277 VAC (20 amps max per switch).

## IN-WALL FOR INDOOR OR PROTECTED OUTDOOR AREAS



**14-4400** Single SS Wall Plate w/Gang Box



**14-4405** Dual SS Wall Plate w/Gang Box

## IN-WALL FOR EXPOSED OUTDOOR AREAS



**14-4410** Single Flush Mount w/Weatherproof Cover



**14-4415** Dual Flush Mount w/Weatherproof Cover

## SURFACE MOUNT FOR EXPOSED OUTDOOR AREAS




**14-4420** Single Surface Mount w/Weatherproof Box



**14-4425** Dual Surface Mount w/Weatherproof Box

## WIRING DIAGRAM

CONNECTIONS  
TO BE MADE  
IN J-BOX

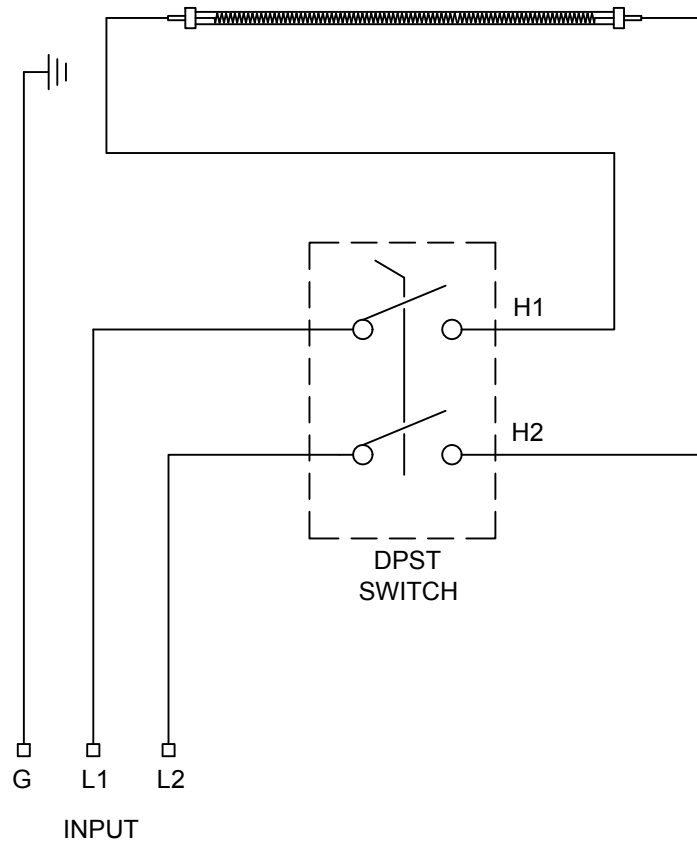

**NOTE:** Replace L2 with Neutral for 120 & 277 VAC Applications.

Decora Switch  
DPST Double Pole Single Throw  
Range:120/277 VAC  
Recommended not to Exceed  
120 VAC = 1800 Watts Max  
208/220 VAC = 3000 Watts Max  
240/277 VAC = 4000 Watts Max  
20 Amps Max

<b>INFRA<sup>TECH</sup></b> <small>www.infratech-usa.com</small>		15700 S. Figueroa St. Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674
DESCRIPTION		
ON/OFF SWITCH ASSEMBLIES DOUBLE POLE SWITCH WIRING 120/277 VAC 20 AMP MAX		
DATE	ITEM#	N/A
Feb. 25, 2016	DRAWN BY:	MD