


- 1 Remove all packaging from parasol, including inside the parasol.
- 2 Pull pin to unlock cam lock handle. Make sure cam lock handle is open per drawing shown.
- (3) Insert cover on to mast.

  Place parasol on SECURITY STEM.
- 4 Push cam lock handle (per drawing shown) until engaged in the proper gear slot with the cam lock handle in the downward position.

\* To rotate parasol: Pull pin to unlock cam lock handle, pull up and turn parasol to desired location. Lock cam lock handle down.





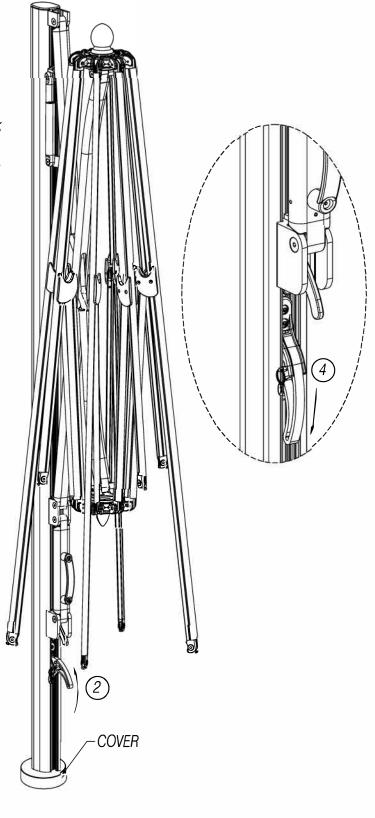



## OPERATING INSTRUCTIONS

OCEAN MASTER MAX SINGLE AND

**DUAL CANTILEVER AUTO PISTON LIFT** 5 Gently separate EACH RIB INDIVIDUALLY from center hub, approx. 24-36"/60-90Cm. If rib does not move easily, DO NOT force. Inspect product for additional packaging. (6) Push up Handle to Stopper until the cart is locked per drawing shown. STOPPER  $\bigcirc$ HANDLE 24-36" (5)



7 To close, hold Handle then push down Car Lock and slide Handle down. Close parasol during wind conditions that exceed manufacturer's specifications.

